

Advertising Material Specifications

Unit sizes

Material size	Depth (mm)	Width (mm)
Double-page spread ¹ , double-page image ²		
Trim size	292	450
Bleed size	302	460 (includes 5 mm bleed to all edges)
Type area	262	420 (allows 15 mm margin on all edges)

- For material in PDF format, supply as two separate pages. DO NOT supply as a single spread.
- For images spanning a double-page spread, the image should be split and moved 4 mm toward the outer edge of the page to allow for gutter loss.

Full page

Trim size	292	225
Bleed size	302	235 (includes 5 mm bleed to all edges)
Type area	262	195 (allows 15 mm margin on all edges)

Half-page horizontal	127	193
Half-page vertical	263	92
Quarter page	127	92


Printing specifications and binding

Screen ruling	175 lpi
Colours	CMYK, greyscale
Binding	Burst bound

Display advertising

Suppliers of digital material are responsible for checking that all files are complete and correct before sending. Any work required to update files or process non-compliant material will incur a charge – minimum charge \$200.

Format	Macintosh digital. We do not accept film or formats other than those listed below.
Hardware	Macintosh compatible CD or DVD.
Software	InDesign CS3, Quark Express 6, Photoshop CS3, Illustrator CS3, Adobe Acrobat PDF to our specifications. We do not accept other formats including PageMaker, Freehand, CorelDraw, Microsoft Word, Microsoft Powerpoint or Microsoft Publisher.
Fonts	All fonts, both printer fonts and screen fonts, must be embedded or supplied. Be sure you include fonts that have been used in EPS files. Only PostScript fonts will be accepted.
Colour	Text and images must be supplied CMYK or greyscale, not RGB or other colour formats. No embedded colour profiles. Spot colours must be converted to CMYK.
Proof	An accurate press-quality digital proof prepared from the files supplied must accompany the material. Proofs to be used for colour matching must be labelled as such. Other proofs are accepted for content layout only.
Images	All images and logos supplied must be TIFF or EPS files. JPEGs will only be accepted subject to quality and will be converted to TIFF and CMYK. Resolution 300 dpi or better at 100% scaling (the final size at which they will be used). Line art 1200 dpi at 100% scaling. If file needs transparency flattening when printing, it must be high resolution.
Bleed	Bleed should be at least 3 mm; 5 mm is recommended.
Registration marks	Offset all registration marks by at least 3 mm; 5 mm is recommended, so they clear the bleed.
Double-page spreads	Please supply the PDF as two single pages, NOT AS A SPREAD. For images spanning a double-page spread, the image should be split at the gutter and moved 4 mm toward the outer edge of each page to allow for gutter loss.
Supplying high-resolution PDF files	When creating high-resolution PDFs, please ensure: <ul style="list-style-type: none"> • all fonts are embedded • images are CMYK and at least 300 dpi • black areas are set to overprint • bleed and trim marks are included
Material instructions	A material instructions sheet listing client, supply date, magazine issue date, magazine/feature, key, file or production number(s) must accompany files and proof.
Email limit	8 Mb. Please contact Production to discuss FTP arrangements and other options for larger files.

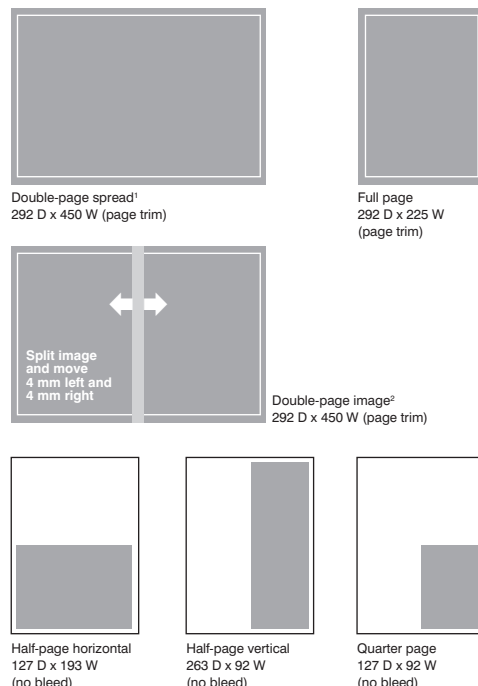

Advertising enquiries

Vic, SA, Tas

Emma Inteman
Sacha Summerfield
Ph: +61 3 9646 4760
Fax: +61 3 9646 4918

NSW, Qld, ACT, NT

Victoria Hawthorne
Lana Golubinsky
Ph: +61 2 9380 7000
Fax: +61 2 9380 7600

WA

Jamie O'Keeffe
Ph: +61 8 9381 7766
Fax: +61 8 9382 4850

Material Enquiries

Architecture Media Pty Ltd
Level 3, 4 Princes Street
Port Melbourne Vic 3207
Ph: +61 3 9646 4760
Fax: +61 3 9646 4918
Email: production@archmedia.com.au
Web: <http://www.architecturemedia.com>

Important

When sending material be sure to indicate which magazine the material is for.